


Product Details

FLEXIBLE SOLAR PANEL FLEX375



ETFE Surface





Junction Box



MC4

Module Diagram

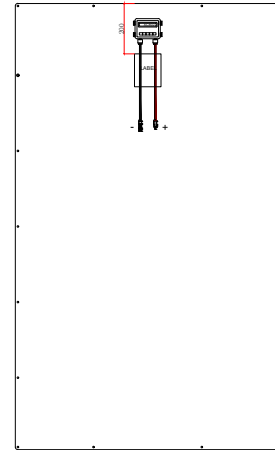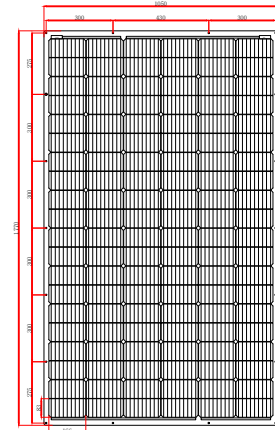

Electrical Characteristics

Maximum power(Pmax)	375W
Open-circuit voltage(Voc)	38.8V
Voltage at Pmax(Vmp)	33.0V
Short-circuit current(Isc)	12.05A
Current at Pmax(Imp)	11.37A
Cells Efficiency(%)	24.40%
The maximum system voltage	600V DC(IEC)
Power temperature coefficient	-0.38%/°C
Voltage temperature coefficient	-0.36%/ °C
Current temperature coefficient	+0.07%/ °C
Output power tolerance	±3%
Operating Temperature	-40°C+85°C

Specifications

Solar cell brand	166 mono solar cells
No.of cells and connections	120(6*20)
Module dimension	1050*1770*2mm
Weight	5.74kg
Output cable	JB (3pcs 20SQ045 diodes) + 0.9m 4.0mm ² cable+MC-4 compatible
Waterproof	IP67
Certifications	CE, ROHS
Warranty	5 years

